


Alfresco Mini


Outdoor (Iroko)



| | | | |
|---------------|--------|-------------------------|--------|
| ALFRESCO/3/IR | 3 seat | 73" W x 63" D x 29.5" H | 9994 |
| ALFRESCO/6/IR | 6 seat | 76" W x 63" D x 29.5" H | 11,300 |

Alfresco Mini

Indoor (Birch Ply)

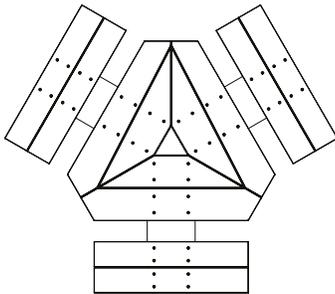

| | | | |
|---------------|--------|-------------------------|--------|
| ALFRESCO/3/BP | 3 seat | 73" W x 63" D x 29.5" H | 9010 |
| ALFRESCO/6/BP | 6 seat | 76" W x 63" D x 29.5" H | 10,400 |

Alfresco Mini Finishes

Outside
Solid Iroko



Solid Iroko

Inside
Tinted Birch Ply



Clear lacquer

Light Pink

Light Blue

Light Ivory

Traffic Red

Frame



Black

Cream

Green


Laminate on ply

Frame




Brushed stainless steel



Finish information

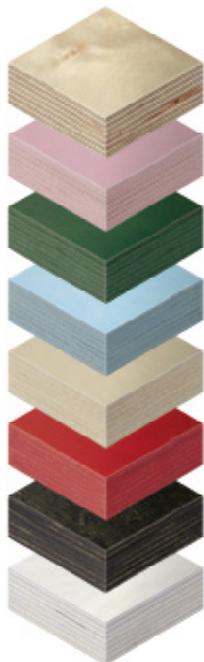

Lacquered Birch Ply
FSC European birch ply with two coats of a clear protective lacquer suitable only for inside use.



Fenix NTM Laminate (POA)
FSC European birch ply with Fenix NTM Laminate. Fenix is soft touch, antifingerprint and superficial scratches can be repaired. Suitable only for inside use.



Maintenance

These products have stainless steel supports and thick iroko slats.

The stainless steel is finished with a clear lacquer and only needs regular cleaning.

The iroko hardwood is provided unfinished and can be left unfinished throughout its life. If so, it will gradually lose its natural colour to become grey, and the grain will become more prominent.

This is entirely normal and some people prefer this look, and roughness can be sanded back if necessary. If customers prefer to retain the original look, they can oil the wood periodically starting after the untreated wood has lost its oily surface from initial exposure to the elements (the new wood surface will not absorb oil and this is why it is not supplied with an oil finish).

After the first oiling, usually done after 6 months exposure, the next oiling will be needed in about 12 months time depending on exposure conditions and the weather.

We recommend Osmo Oil 007 applied to manufacturers' instructions.

ROUTINE CLEANING: Use a non-abrasive, damp cloth and mild detergent only.

STAIN REMOVAL: Scuff marks and persistent stains can be removed from the stainless steel supports using BigWipes (bigwipes.com). Stains to the iroko can be removed by lightly sanding back.

AVOID: Using cleaners containing granular material or acids.

Optional extras

Bolt-down lugs

Bespoke sizes

Parasol hole