

General

Minimum order quantity

None

Warranty

All Tote Trays carry a Limited Lifetime warranty
Carts and Wall Units have 10 years warranty

Return policy

Order cancellation permitted before product ships subject to
\$75-100 re-stocking fee per product

Cart and Unit materials

Front and rear fully welded, 1" square, 16-gauge steel
tube frames with baked-on epoxy finish.

Top panels constructed from 18-gauge
formed steel sheets with baked-on epoxy finish.

Runners, molded from engineering grade ABS, secured to
steel tube frames.

Frames nested utilizing fluted coated steel metal frame
connectors.

Units fitted with adjustable feet.

Carts fitted with lockable heavy-duty rubber casters
that support over 400 lbs (per cart).


Tray materials

Solid Color Tote Trays injected molded from SuperTuff
HIPS, High Impact Polystyrene.

Crystal Line Tote Trays injected molded with engineering
grade ABS, Acrylonitrile Butadiene Styrene.

Tray dimensions (W x L x H)

Slim Line Single Depth	12¼ x 16¾ x 3
Slim Line Double Depth	12¼ x 16¾ x 6
Slim Line Triple Depth	12¼ x 16¾ x 9
Slim Line Quad Depth	12¼ x 16¾ x 12
Wide Line Single Depth	18½ x 16¾ x 3
Wide Line Double Depth	18½ x 16¾ x 6

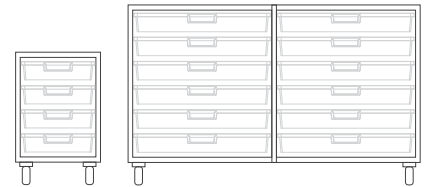


Cart and Wall Unit Dimensions



Single Short Cart (S)
W 15¾ x H 21½ x D 18




Single Tall Cart (S)
W 15¾ x H 29 ¾ x D 18



Double Short Cart (S)
W 29½ x H 21½ x D 18



Double Tall Cart (S)
W 29½ x H 29 ¾ x D 18



Double Short Cart (S)
W 43½ x H 29 ¾ x D 18




Single Mobile Tower (S)
W 15¾ x H 41¾ x D 18



Double Mobile Tower (S)
W 29½ x H 41¾ x D 18




Triple Mobile Tower (S)
W 41½ x H 41¾ x D 18




Triple Mobile Tower (S)
W 43½ x H 45 x D 18



Single Short Cart (W)
W 21¾ x H 29¾ x D 18



Double Short Cart (W)
W 41½ x H 29¾ x D 18



Double Mobile Tower (W)
W 41 5/8 x H 41¾ x D 18



Single Mobile Tower (W)
W 21¾ x H 41¾ x D 18



Double Mobile Tower (W & S)
W 35½ x H 41¾ x D 18



Double Wall Unit (S)
W 28¾ x H 75½ x D 17



Triple Wall Unit (S)
W 42 5/8 x H 75½ x D 17



Shelf & Storage (S)
W 42 5/8 x H 75½ x D 17



Single Wall Unit (W)
W 20 7/8 x H 75½ x D 17



Double Wall Unit (W)
W 40¾ x H 75½ x D 17

(S) - Slimline trays (W) - Wideline trays

60 Module Wall Unit



Single Mobile Tower (S)	Double Mobile Tower (S)	Triple Mobile Tower (S)	Triple Mobile Tower (S)
W 15¾ x H 41¾ x D 18	W 29½ x H 41¾ x D 18	W 41½ x H 41¾ x D 18	W 43½ x H 45 x D 18

(S) - Slimline trays (W) - Wideline trays

60 Module Wall Unit

Go Storage "High Capacity Storage" wall unit frames are constructed from 16-gauge 1" (25.4mm) square welded steel tubing with an epoxy powder coated finish. The top panel is constructed from 18 gauge formed steel, epoxy powder coated sheets are securely anchored to the metal frames with machine screw fasteners. All wall unit upper frames are nested to bottom frames utilizing fluted, coated steel metal frame connectors. Units are fitted with adjustable feet.

The "shatterproof" tote tray structural Runners are molded from Acrylonitrile Butadiene Styrene (ABS) Plastic. These runners are secured to the steel frames with 1/4" tap screws. All cart solutions incorporate the patented Glide & Tilt Tote Tray Runner System. This innovative system is specifically designed to allow the accompanying ABS tote trays to stop in an angled open position without falling out of the unit, making for easy access and viewing.

Additional Specifications:

- Top panel (on upper section only) shall be constructed from 18 gauge formed steel, baked-on epoxy coated sheets securely fastened to the steel frames with hex head machine screw fasteners. "Optional" pegboard and solid side panels shall be constructed from 18 gauge formed steel, baked-on epoxy coated sheets securely fastened to the steel frames with hex head machine screw fasteners.
- Product coatings are specifically designed to resist wear, abrasion, corrosion and chemicals.
- Glide & Tilt® structural runners specifically designed for steel construction shall be manufactured with a vertical alignment rail to the inside of the runner.
- High Capacity Wall Unit metal frames shall be provided with (4) coated steel metal frame connectors and (4) adjustable feet.
- Depths of all units shall be 17" out to out. The actual physical dimension of the upper frame assembly is 17".
- High Capacity Wall Units are offered in two (2) "slim line" configurations: a double and a triple column slim line incorporating 36 and 54 modules respectively. Tote tray configurations, size and quantity are custom selected
- High Capacity Wall Units are offered in two (2) "wide line" configurations: a single and a double column wide line incorporating 18 and 36 modules respectively. Tote tray configurations, size and quantity are custom selected
- High Capacity Wall Units are additionally available in a combination wall unit, (1) wide line column and (1) slim line



Wall Unit, 60 Module Dimensions:
W 42 5/8 x H 83"x D 17"

Frame Finishes

Eco Colors



Optimism (OP)



Collaboration (CO)



Passion (PS)




Imagination (IM)



Creativity (CR)



Humanity (HM)



Peace (PE)




Balance (BA)



Zen (ZN)

Trays

Crystal trays (glass-like transparency)



Clear (CL)



Neon Green (NG)



Neon Orange (NO)



Tinted Blue (TB)



Tinted Purple (TP)

Contact info

Inquiries

hello@muzo-works.com

Purchase orders

sales@muzo-works.com

360 Kiwanis Blvd,
West Hazleton, PA 18202

(800) 670-2578

muzo-works.com