

# muzo

## Desktop Powerball

### General

---

#### Minimum order quantity

1 on standard color  
10 for special colors and finishes

#### Warranty

Separate sheet

#### Return policy

Order cancellation permitted before product ships subject to \$75-100 re-stocking fee per product  
Once product ships no returns unless covered by warranty.

#### Materials

Plastic

#### Codes


DTPB/WH 6" diameter

#### Standard option

2 x power, 1 x TUF.  
Other options are available, please contact us for accurate lead times and minimum order quantities.  
Fixed or freestanding mounting.


#### Removable cassettes

Power cassettes are removable and come with a little tool so you can remove and replace old or broken cassettes without having to replace the whole unit.



### Dimensions

---



### Finishes


---

Standard finish



Polished white

Special colors in  
satin or gloss

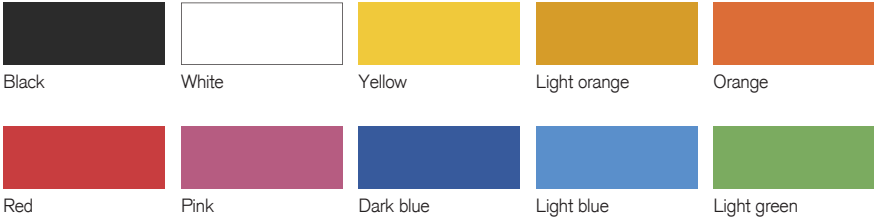

### Shipping dimensions

---

| Product type | Height | Width | Depth | Weight |
|--------------|--------|-------|-------|--------|
| DTPB/WH      | 5"     | 6"    | 6"    | 2 lbs  |

# muzo

## Desktop Powerball

### Technical

---



1. Hemisphere
2. Power socket outlet (up to 3)
3. Side exit for power cable only
4. Power socket can be substituted with TUF USB
5. Power can exit via the base

#### Sockets

The top has 3 inlet/outlet sockets. Each socket can be specified with either a Nema (USA) electrical power socket or a TUF (Twin Usb Fast charge). The Nema socket is rated at 15A in line with UL962A. The rating is the same whether 2 or 3 sockets are specified. The TUF charger is currently rated at 2.3A max combined across the 2 USB ports.

# muzo

## Desktop Powerball

### Installation

#### Base power cord



Base power cord entry Desktop Powerball's are supplied as standard with the "clamp 80" kit for secure mounting to an 3.25" grommet hole. For screw fixing, Desktop Powerball can be ordered with just the bayonet mounting ring.

#### Side power cord



Desktop Powerball is fitted with silicone rubber feet to provide grip and stability. Special brackets can be supplied to order for fitting the side power cord entry Desktop Powerball to tool/equipment rails.

#### Mounting adaptor ring screw fixing

Place mounting ring over 3.25" hole.  
Screw mounting ring in place.





Align with mounting ring as shown





Twist into place until you hear a 'click'

#### Clamp 80 Kit

Place mounting ring over 3.25" hole. Place 3.25" grommet into mounting ring and screw up retaining nut until firmly in place.

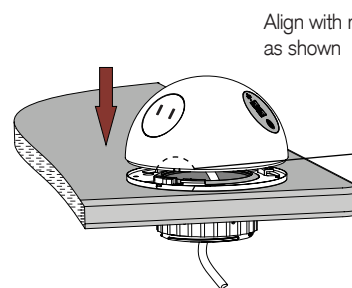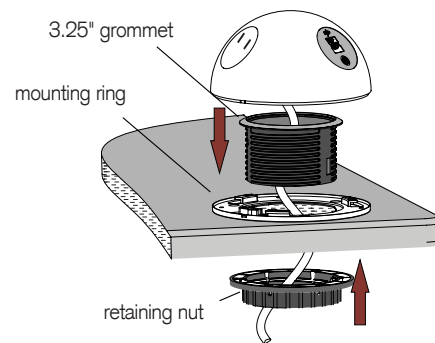

Align with mounting ring as shown



Twist into place until you hear a 'click'

Contact info

---

Inquiries

[hello@muzo-works.com](mailto:hello@muzo-works.com)

Purchase orders

[sales@muzo-works.com](mailto:sales@muzo-works.com)

72 Hillside Drive, Drums,  
PA 18222, USA

(570) 788 0888

[muzo-works.com](http://muzo-works.com)